



Standard Features

Nominal Flow Rate: 40/80/120/160lpm
 Electro Mechanical Totalizers
 Preset Function
 LCD Back Light Display 34mm
 Electronic Calibration
 ATEX 2014/34/EU
 MID 2014/32/EU

Optional Features

EMV pay at the Pump
 Interface with OPT Systems.
 RFID Transactions
 Automatic Temperature compensation
 On Pump printer
 Vapor Recovery Stage II

M-5200 Series provides:

1. High accuracy Flow Meter eliminates loss of product.
2. State of art Electronics
3. Robust Construction
4. Visual Standards according to customer's needs
5. Low total life circle cost
6. Efficient long standing support on genuine Spare Parts
7. Fast deliveries
8. Extended Warranty

RETAIL M-5200 SERIES

Design features



STATE OF ART PRODUCTION FACILITIES

- Production facility housed in an industrial building of 3500m². To comply with the up-to-date technological market requirements the production is equipped with state of art equipment such as punching machines [CNC], testing facilities, underground fuel depots and MRP warehouses software.
- Production facility certified according to ATEX 2014/34/EU and MID/2014/32 EU Directives.




EXTERIOR HOUSING

- Galvanized Steel Metal Panels, powder coating paint for excellent appearance, maximum protection and long life.
- Durable construction in harsh environmental conditions.
- Stainless Steel Metal Panels (optionally)



HYDRAULICS

- High quality hydraulic components designed for Easy Installation, Simplicity on Operation and Minimum Maintenance Requirements.
- Flow Meter and Pumping Unit are certified according to MID 2014/32/EU Directive, ensuring highest accuracy.

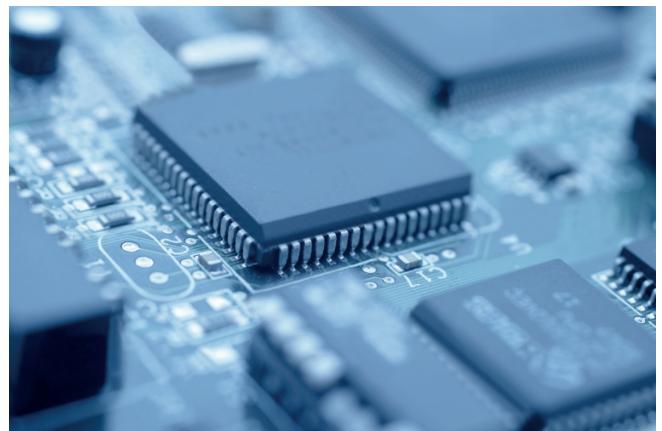


ELECTRONICS

- R&D Electronics Dept. manned with certified engineers, offering tailor made solutions.
- Electronics according to latest technology, with password MID Certified.
- Built in diagnostics with error codes indicated in state of the art LCD Backlight Displays.
- IFSF Communication Protocol.

RETAIL M-5200 SERIES

Technical Specs

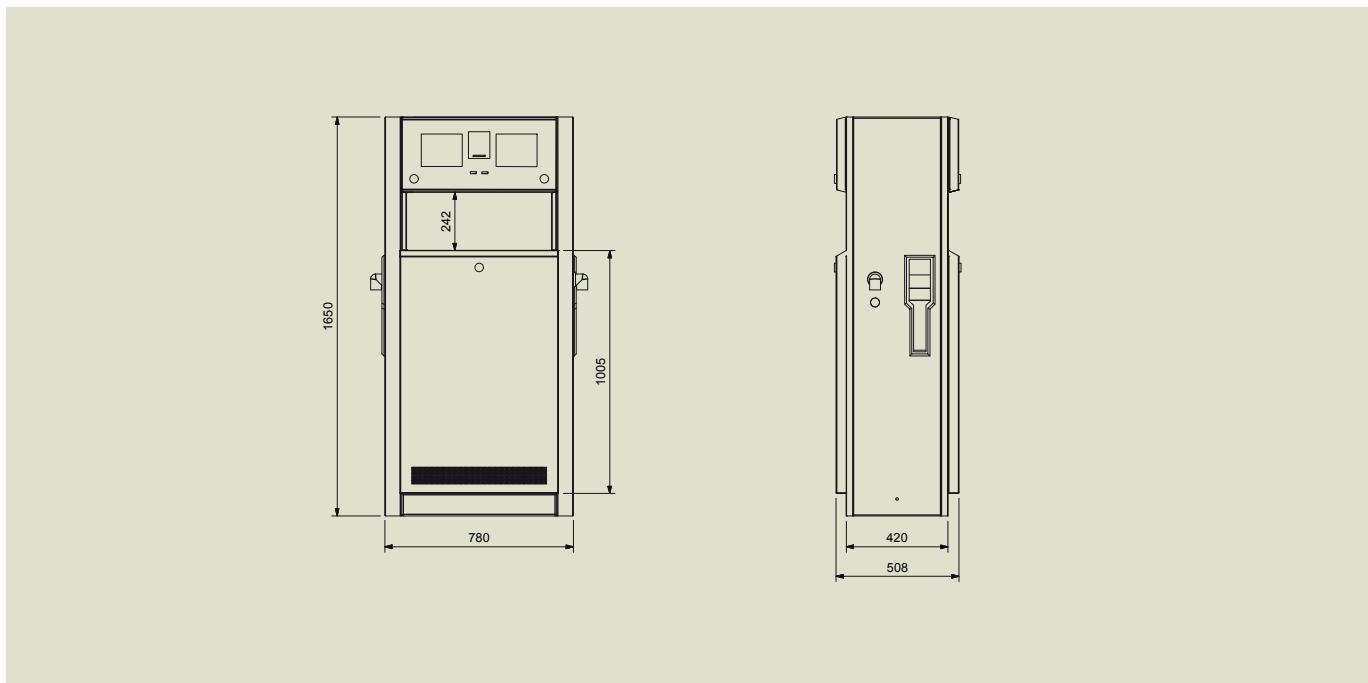

RETAIL FUEL DISPENSER

SUCTION TYPE OR PRESSURE TYPE

SINGLE OR DUAL HOSE – SINGLE OR DUAL PRODUCT

FLOW RATE: 40 / 80 / 120 / 160 lpm

Flow Meter

Positive displacement meter, corrosion proof, composed of materials with long-life and long-wear characteristic.

Measuring accuracy within: $\pm 0.2\%$.

Cylinder cover adjustment device provides easy field calibration.

Micro exterior adjustment.

Min. Flow rate: 5 lpm

Max. Flow rate: 90 lpm

Minimum adjustable quantity: 0.025%.

Delivery capacity per revolution: 0.5L

Repeatable Tolerance: $\pm 0.1\%$

Applicable with unleaded gasoline 15%-20% MTBE / Gas Oil / kerosene.

MID Certification

Suction Pump

Sliding vane type (Optionally Gear Type)

Suction head 4 meters.

With air eliminator, micro filtration, adjustable by-pass valve and control valve.

Belt driven pumping unit.

Min. Flow rate: 5 lpm

Max. Flow rate: 90 lpm

MID Certification

Electronics

Atmel AVR Risc-Processor

Accuracy class: 0.5

Electromagnetic environment class: E1

Automatic Temperature Compensation

Self diagnostics

MID Certification

Hose

Type: Petrochemical & Chemical

Internal diameter: 3/4" (Gasoline) / 1" (Diesel)

Length: 4.0m (Optionally any other length)

High quality braid reinforced antistatic hose

Certified: EN 1360/1

Nozzle

Type: Automatic

Body: Aluminum

Seals: Buna – N, Viton

Spout: Aluminum


Inlet diameter for Gasoline: 3/4"

Inlet diameter for Diesel: 1"

UL LISTED / ATEX

RETAIL M-5200 SERIES

Design features

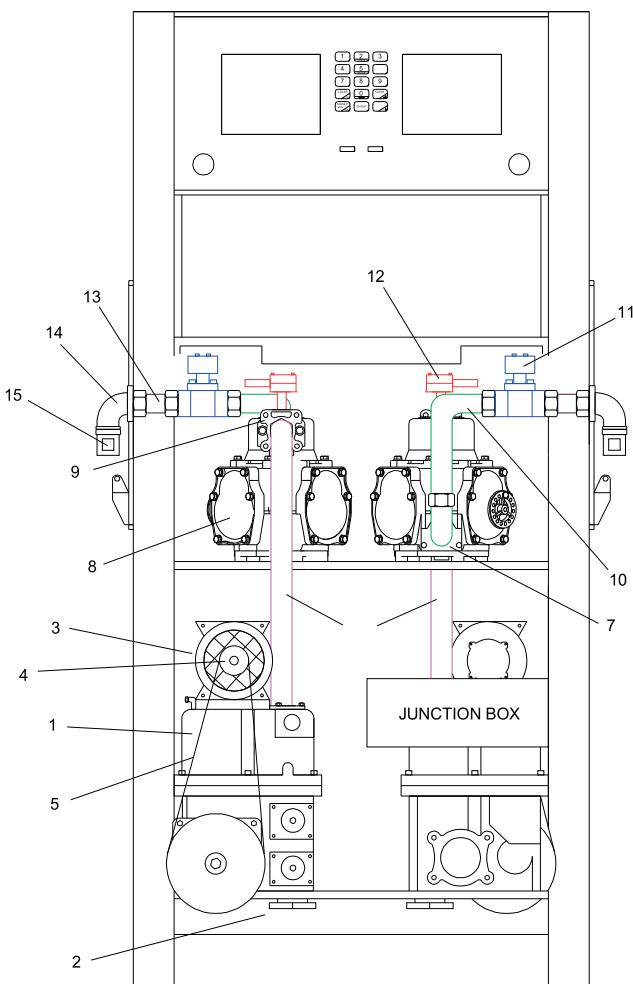

I/N	DESCRIPTION
1	PUMPING UNIT MID 2014/32/EU CERTIFIED
2	PUMPING UNIT INLET FLANGE
3	ELECTRIC MOTOR ATEX 2014/34/EU CERTIFIED
4	PULLEY
5	V-BELT
6	FLOWMETER INLET PIPE
7	FLOWMETER OUTLET FLANGE
8	FLOWMETER MID 2014/32/EU CERTIFIED
9	FLOWMETER INLET FLANGE
10	FLOWMETER OUTLET PIPE
11	SOLENOID VALVE ATEX 2014/34/EU CERTIFIED
12	PULSER ATEX 2014/34/EU CERTIFIED
13	OUTLET PIPE
14	FUEL DISPENSER, CAST OUTLET 1"
15	SIGHT GLASS 1"

Spyrides Dispenser Range



Documentation

- Installation, Operation and Maintenance Manual
- Parts Manual
- Warranty Declaration
- All relevant Certificates



Spyrides Group of Companies

24 Athinon Avenue, 104 41 Athens, Greece Tel.: +30 210 5228603, Fax: +30 210 5248347

www.neotec.gr
information@neotec.gr